

CAMRegis Temperature and humidity loggers





Inputs for NTC, Pt1000 digital and 4-20 mA probes.

Large, high luminosity graphic display.
Setup wizard and text menus in multiple languages, with on-screen help.
Quick print button, to print out the last calendar week of all entries logged.
Internal memory up to three years, with a recording frequency of 15 minutes.
Designed in compliance with European standard EN 12830.
Integrated RS485 communications.
ModBus protocol.
Possibility of connecting Pt100 probes to 5-input units.

Application: Industrial and commercial refrigeration, processing industry, etc.

AKO-1574x

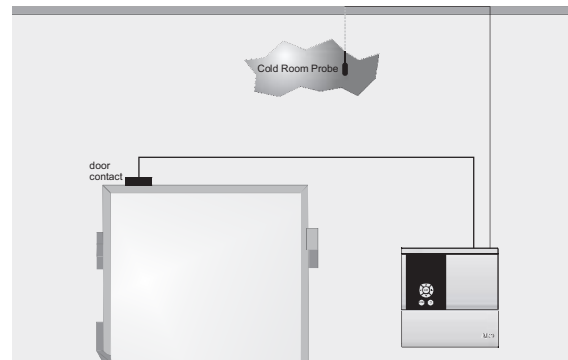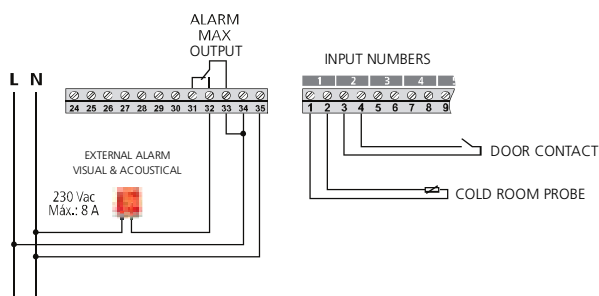

Event Log Function in CAMRegis recorders

- A cold room that keeps the door open for long periods of time may decrease the efficiency of the installation
- CAMRegis help you avoid problems and economic losses due to his record of events (opening and closing of doors)
- The event log includes the date, time and type of event
- Possibilities to program an audible alarm and relay output to warn negligence door open
- The new event long function, records state changes in the input configuration to "digital input"
- Note the number of variable of an establishment, such as opening and closing the coldroom door, the state changes switches, defrost thermostat, thermal protection of the compressor, etc.. it can be very useful for analyzing the health of our facilities
- Followed by the cold room door
- Temperature range depending on probe model -150 °C to +590 °C
- Range 4-20 mA -999 to +999
- Display and recording 0.1 °C. Accuracy ± 1 °C
- Input accuracy 4-20 mA $\pm 1\%$ (mA)
- Housing dimensions 230 x 230 x 90 mm
- Alarm relays 2 SPDT 8A, 250 V, $\cos\phi = 1$
- Power supply 100-240 V~
- IP65 Protection
- Autonomy 6 hours recording, 3 months to maintain time and date

Reference	Description	Family	Pack
AKO-15780	CAMRegis-2, 2-input temperature and humidity logger	1570	1 Unit
AKO-15782	CAMRegis-2i, 2-input temperature and humidity logger with printer	1570	1 Unit
AKO-15750	CAMRegis-5, 5-input temperature and humidity logger	1570	1 Unit
AKO-15752	CAMRegis-5i, 5-input temperature and humidity logger with printer	1570	1 Unit
AKO-15740	CAMRegis-10, 10-input temperature and humidity logger	1570	1 Unit
AKO-15742	CAMRegis-10i, 10-input temperature and humidity logger with printer	1570	1 Unit
AKO-14901	NTC probe, -50 to +100 °C, 1.5 m cable	1590	48 Units
AKO-80013	Wall humidity probe, 10%-95%, -5/50 °C, 4-20 mA output	1590	1 Unit
AKO-80040	Tubular humidity probe, 5%-95%, -10/70 °C, 4-20 mA output	1590	1 Unit
AKO-15703	Spare roll of thermal paper	1590	10 Units (B)
AKO-15704	Spare battery	1590	1 Unit
AKO-80039	USB/RS485 converter with 2 m cable to PC	1580	1 Unit
AKO-5008	SOFTRegis, software for managing and monitoring CAMRegis loggers	1580	1 Unit

(B) minimum and indivisible packaging units.